

Quaden[®]

PRODUCT CATALOG 2025 VER.3



Quaden is committed to providing our customers with premium automotive accessories with superior performance. Quaden products are manufactured using premium quality materials with some meeting military specifications. They undergo stringent quality checks to ensure superior performance and are long lasting with specifications as claimed.

ABOUT US

QUADEN IS COMMITTED TO PROVIDING OUR CUSTOMERS WITH PREMIUM AUTOMOTIVE ACCESSORIES WITH SUPERIOR PERFORMANCE. QUADEN PRODUCTS ARE MANUFACTURED USING PREMIUM QUALITY MATERIALS WITH SOME MEETING MILITARY SPECIFICATIONS. THEY UNDERGO STRINGENT QUALITY CHECKS TO ENSURE SUPERIOR PERFORMANCE AND ARE LONG LASTING WITH SPECIFICATIONS AS CLAIMED.

QUADEN WAS STARTED IN 2011 WITH A GOAL TO PROVIDE BEST IN CLASS AUTOMOTIVE ACCESSORIES TO OUR CUSTOMERS. WE HAVE BEEN PIONEERING IN INTRODUCING LATEST AND STATE OF THE ART TECHNOLOGY IN OUR PRODUCTS. WITH SOUND TECHNICAL KNOWLEDGE IN THIS FIELD, WE ALSO PROVIDE EXCELLENT TECHNICAL SUPPORT FOR OUR PRODUCTS.

QUADEN IS COMMITTED TO BRING LATEST PRODUCTS DESIGNED AND MODIFIED TO SUIT AUTOMOBILES IN INDIA. OUR RANGE INCLUDES AUTOMOTIVE LED LAMPS, AUTOMOTIVE GRADE AMPLIFIER CABLES, SPEAKER CABLES, RCA CABLES, FUSE HOLDERS, DISTRIBUTION BLOCKS TERMINALS, SPEAKER GRILLS, SILICON SPEAKER SHIELD, HID KITS, TYRE PRESSURE MONITORING SYSTEMS, PARKING SENSORS, AUTOMOTIVE SWITCHES, ETC

SWITCHES



SWITCHES



ROUND ROCKER SWITCH

MODEL : QSW-RR

Single pole single throw
12V 20A rating
With LED indicator



OVAL SWITCH

MODEL : QSW-OV

Single pole single throw
12V 20A rating
With LED indicator



METAL PUSH BUTTON SWITCH

MODEL : QSW-MPS

Single pole single throw
12V 15A rating
With LED indicator
With wiring harness



DRIVING SWITCH

MODEL : QSW-DL

Single pole Double throw
12V 20A rating
With LED indicator



TOGGLE SWITCH

MODEL : QSW-TG

Single pole Double throw
12V 20A rating
With LED indicator



IP65 SWITCH

MODEL : QSW-RR-WP

Single pole Double throw
12V 20A rating
With LED indicator

Quaden®

COPPER CLAD ALUMINUM CABLES



Virgin Aluminium, CCA, highly flexible frosted blue PVC Jacket with
resistant to high temperature, abrasions & chemicals,

CCA CABLES



4GA AMPLIFIER POWER CABLE

MODEL: QAC-CCA4GA30

910 strands 0.15 mm diameter
OD 10 mm
30mts spool



8GA AMPLIFIER POWER CABLE

MODEL: QAC-CCA8GA50

385 strands 0.15 mm diameter
OD 6.5mm
50mts spool



12GA WOOFER CABLE

MODEL: QSC-CCA12GA100

168 strands 0.15 mm diameter
OD 4.5+4.5 mm
100mts spool




16GA SPEAKER CABLE

MODEL: QSC-CCA16GA100

64 strands 0.15 mm diameter
OD 3+3 mm
100mts spool

OXYGEN FREE COPPER CABLES

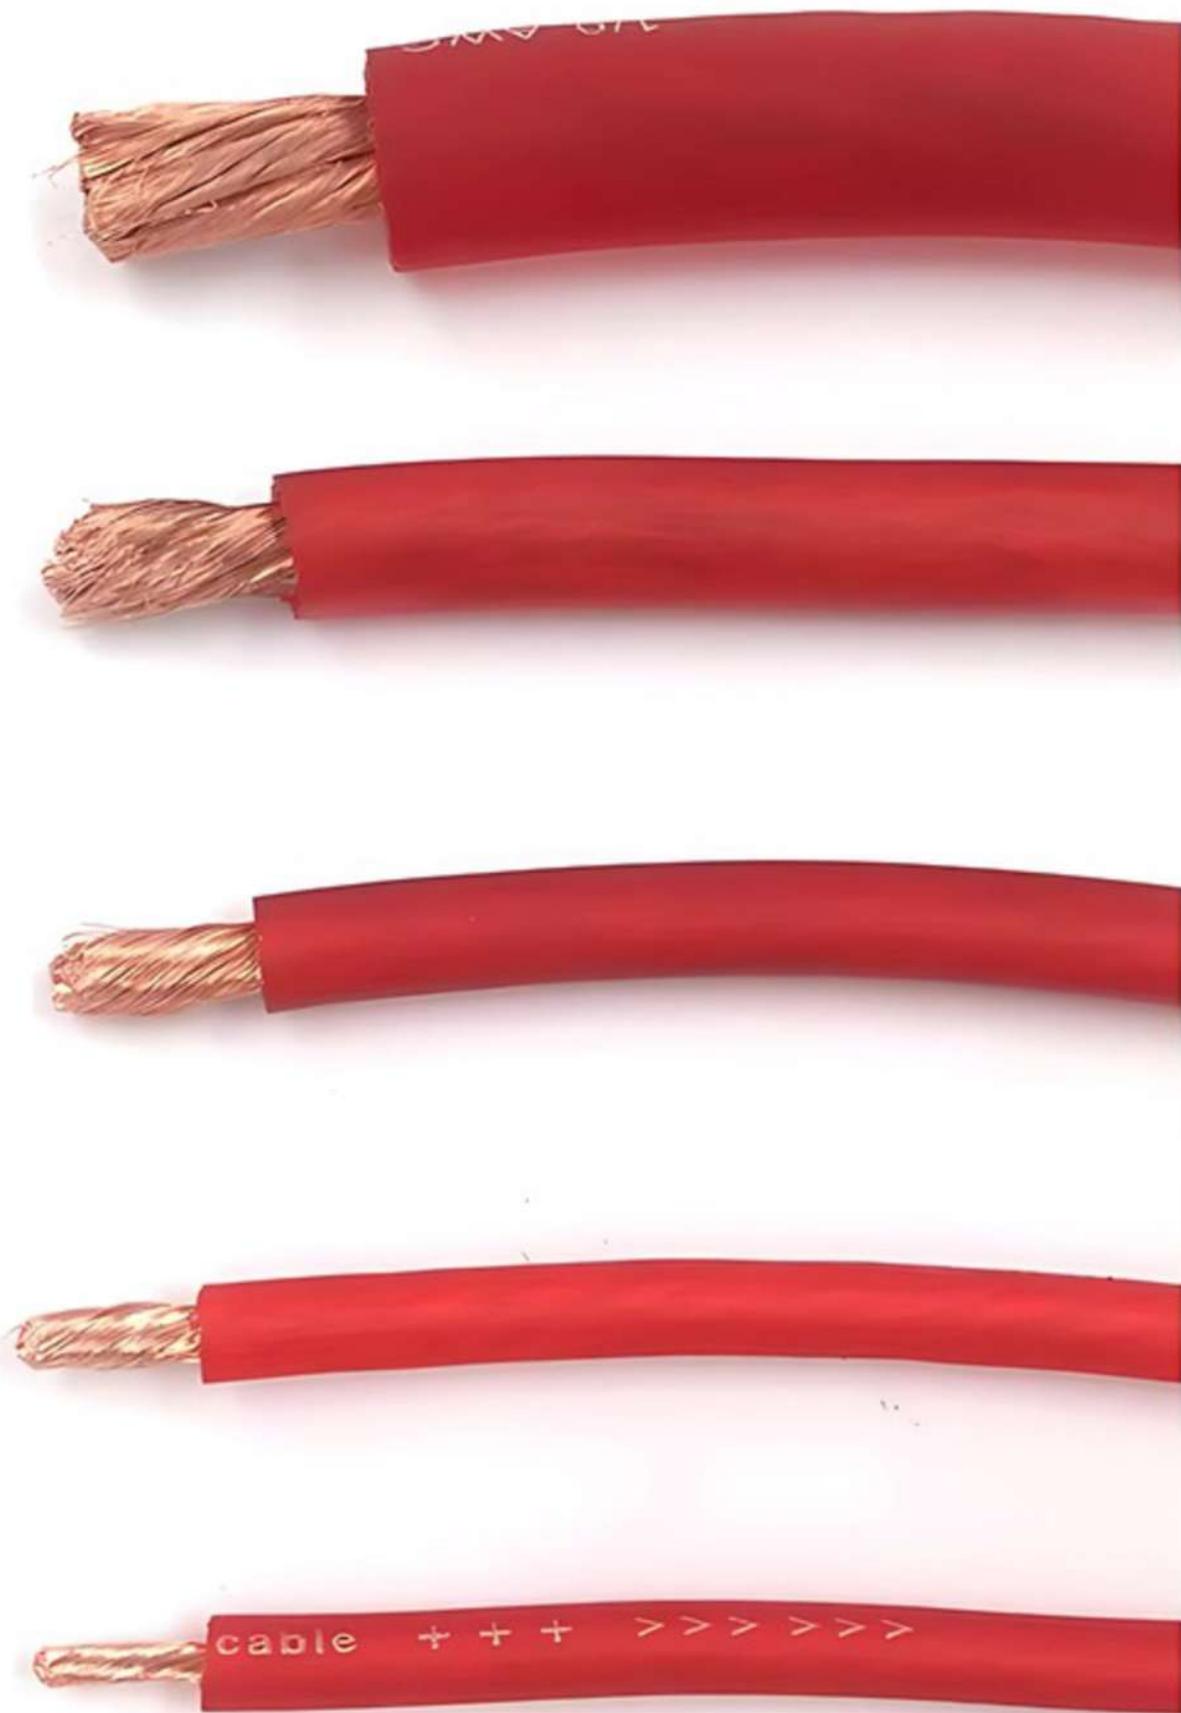

Virgin Oxygen free copper, highly flexible frosted purple matt finish PVC Jacket with resistant to high temperature, abrasions & chemicals

OFC CABLES



0GA AMPLIFIER POWER CABLE

MODEL : QAC-OFC0GA15

7*7*81 strands 0.12 mm diameter
OD 15mm
15mts spool



2GA AMPLIFIER POWER CABLE

MODEL : QAC-OFC2GA20

7*7*45 strands 0.12 mm diameter
OD 12mm
20 mts spool



4GA AMPLIFIER POWER CABLE

MODEL : QAC-OFC4GA30

7*7*29 strands 0.12 mm diameter
OD 10mm
30 mts spool



4GA AMPLIFIER POWER CABLE - BLACK COLOUR

MODEL : QAC-OFC4GA30-BLK

7*7*29 strands 0.12 mm diameter
OD 10mm
30mts spool



8GA AMPLIFIER POWER CABLE

MODEL : QAC-OFC8GA50

598 strands 0.12 mm diameter
OD 6.5mm
50mts spool



8GA AMPLIFIER POWER CABLE - BLACK COLOUR

MODEL : QAC-OFC8GA50-BLK

598 strands 0.12 mm diameter
OD 6.5mm
50mts spool



10GA AMPLIFIER POWER CABLE

MODEL : QAC-OFC10GA50

466 strands 0.12 mm diameter
OD 5.5mm
100mts spool



12GA WOOFER / SPEAKER CABLE

MODEL : QSC-OFC12GA50

200 + 200 strands 0.12 mm diameter
OD 4.2+4.2 mm
100mts spool



16GA SPEAKER CABLE

MODEL : QSC-OFC16GA100

100+100strands 0.12 mm diameter
OD 3.5+3.5 mm
100mts spool


OFC CABLES



16GA SPEAKER CABLE

MODEL : QSC-OFC16GA50

100+100strands 0.12 mm diameter
OD 3.5+3.5 mm
50mts spool

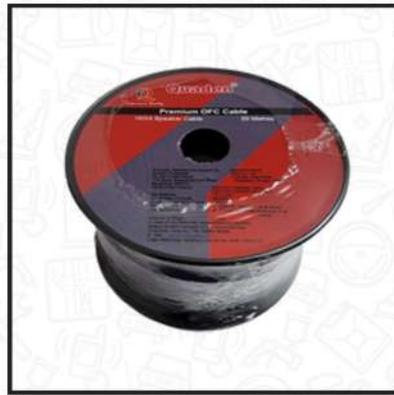

16GA SPEAKER CABLE

MODEL : QSC-OFC16GA20

100+100strands 0.12 mm diameter
OD 3.5+3.5 mm
20mts spool



18GA SPEAKER CABLE

MODEL : QSC-OFC18GA100

65+65 strands 0.12 mm diameter
OD 3.0 x 2mm
100mts spool

AMPLIFIER INSTALLATION KITS



Amplifier cable 5m-1N, black amplifier cable 0.9m-1N, Remote cable 18GA 5m-1N, Speaker cable 16GA 6m-1N, RCA cable 2 channel 5m-1N, fuse holder with fuse-1N, Ring terminal with sheath - 4N, Spade terminal with sheath -2N, Spade lug with sheath -2N, Vinyl butt splice -1N, Self-tapping screw - 2N & Snap-in Wire grommet- 1N

AMPLIFIER INSTALLATION KITS



8GA OFC AMPLIFIER KIT

MODEL: QAK-80FC

- 5mts 8GA Frosted Purple Amplifier Cable
- 0.9mts 8GA Frosted Black Ground Cable
- 5mts 18GA Frosted Purple Remote Cable
- 6mts 16GA Frosted Purple/Black Speaker Cable
- 5mts 2 CH Frosted Transparent Black RCA Cable
- 4*8GA Ring Terminal Nickel with Sheath
- 2*8GA Spade Terminal Nickel with Sheath
- 2*22-18GA Nickel Plated Spade lug with Sheath
- 1*22-18GA Red Vinyl butt splice
- 2*Silver Self-tapping Screw
- 1*Snap-in wire gromment
- Gold Plated Copper 1*Mini ANL Fuse Holder
Nickel with 60AMP Fuse

4GA OFC AMPLIFIER KIT

MODEL: QAK-40FC

- 5mts 4GA Frosted Purple Amplifier Cable
- 0.9mts 4GA Frosted Black Ground Cable
- 5mts 18GA Frosted Purple Remote Cable
- 6mts 16GA Frosted Purple/Black Speaker Cable
- 5mts 2 CH Frosted Transparent Black RCA Cable
- 4*4GA Ring Terminal Nickel with Sheath
- 2*4GA Spade Terminal Nickel with Sheath
- 2*22-18GA Nickel Plated Spade lug with Sheath
- 1*22-18GA Red Vinyl butt splice
- 2*Silver Self-tapping Screw
- 1*Snap-in wire gromment
- Gold Plated Copper 1*Mini ANL Fuse Holder
Nickel with 60AMP Fuse



TWISTED SERIES RCA CABLES



10*2/01.12mm virgin oxygen free copper strands, OD 4+4mm, split pin RCA plug, Sure grip plugs, flexible PVC jacket, high temperature resistant, abrasions and chemical resistant, Aluminum foil shield

TWISTED SERIES RCA CABLES



RCA CABLE 1M

MODEL: QRC-OFC-1M



RCA CABLE 2M

MODEL: QRC-OFC-2M



RCA CABLE 3M

MODEL: QRC-OFC-3M



RCA CABLE 5M

MODEL: QRC-OFC-5M



RCA Y CABLE 1M2F

MODEL: QRC-OFC-1M2F



RCA Y CABLE 1F2M

MODEL: QRC-OFC-1F2M

Quaden®

PLATINUM SERIES RCA CABLES



16*6/0.12mm tinned & 20*4/0.12mm virgin oxygen free copper strands, OD 7mm, gold plated split pin RCA plug, flexible PVC jacket with nylon woven protector, high temperature resistant, abrasions and chemical resistant, Aluminum foil shield

PLATINUM SERIES RCA CABLES



RCA Y CABLE 1F2M

MODEL: QRC-PSOFC-1F2M



RCA Y CABLE 1M2F

MODEL: QRC-PSOFC-1M2F



RCA CABLE 0.5M

MODEL: QRC-PSOFC-0.5M



RCA CABLE 1M

MODEL: QRC-PSOFC-1M



RCA CABLE 2M

MODEL: QRC-PSOFC-2M



RCA CABLE 3M

MODEL: QRC-PSOFC-3M



RCA CABLE 5M

MODEL: QRC-PSOFC-5M



RCA CABLE PLUGS

MODEL: QRC-PLSL-KT



RCA CABLE SILICON SLEEVE

MODEL: QRC-PLSL-KT

PLATINUM SERIES RCA CABLES



RCA CABLE 25M ROLL

MODEL: QRC-CBL -25M

TERMINALS AND CONNECTORS



TERMINALS AND CONNECTORS



BATTERY RING TERMINAL

MODEL: QBRT-4GA & QBRT-8GA

Gold plating
Zinc Alloy
Available for 4ga & 8ga



HIGH POWER SUPPLY TERMINAL

MODEL: QPST-0GA & QPST-4GA

Gold plating
Zinc Alloy
Available for 0ga & 4ga



POWER CORD EXTENSION TERMINAL

MODEL: QPET-4GA

Gold plating
Zinc Alloy
Available for 4ga



RING TERMINAL

MODEL: QRT-4GA10 & QRT-8GA10

Gold plating
Copper Material
Available for 4ga & 8ga



SPADE TERMINAL

MODEL: QST-4GA & QST-8GA, QST-12GA & QST-16GA

Gold plating
Copper Material
Available for 4ga , 8ga, 12GA & 16GA



FERRULE CONNECTOR

MODEL: QFC-4GA10, QFC-8GA10, QFC-12GA10 QFC-16GA10

Copper Material
Available for 4ga, 8ga, 12ga & 16ga



COUPLE ADAPTER SOCKET

MODEL: QCAS-90

Gold plated contacts
Suitable for Sub-woofer / Mid Range
Strong and secure connection



COUPLE ADAPTER SOCKET

MODEL: QCAS-60

Gold plated contacts
Suitable for Mid Range/Tweeter
Strong and secure connection



COUPLE ADAPTER SOCKET

MODEL: QCAS-30

Gold plated contacts
Suitable for Tweeter
Strong and secure connection

TERMINALS AND CONNECTORS



COUPLE ADAPTER SOCKET

MODEL: QCAS-90 PM

Gold plated contacts
Suitable for Sub-woofer / Mid
Range
Strong and secure connection



SPEAKER CONNECTOR 6.3MM

MODEL: QST-63

Gold plating
Zinc Alloy
Available for 4ga



SPEAKER CONNECTOR 4.8MM

MODEL: QST-48

Gold plating
Zinc Alloy
Available for 4ga



SPEAKER CONNECTOR 4.8MM

MODEL: QST-28

Gold plating
Copper Material



FERRULE CONNECTOR

MODEL: QFC-0GAGP

Gold plating
Copper Material
Available for 0ga



FERRULE CONNECTOR

MODEL: QFC-4GAGP

Gold plating
Copper Material
Available for 4ga



FERRULE CONNECTOR

MODEL: QFC-8GAGP

Gold plating
Copper Material
Available for 8ga



FERRULE CONNECTOR

MODEL: QFC-12GAGP

Gold plating
Copper Material
Available for 12ga



FERRULE CONNECTOR

MODEL: QFC-16GAGP

Gold plating
Copper Material
Available for 16ga

FUSE HOLDERS & CIRCUIT BREAKERS



FUSE HOLDERS & CIRCUIT BREAKERS



ANL FUSE FOLDER

MODEL: QFH-ANL-150

Configuration : 1*0GA/2GA/4GA input – 1*0GA/2GA/4GA output
ANL 150A fuse



ANL FUSE HOLDER WITH DISPLAY

MODEL: QFH-ANL-150-DD

Configuration : 1*0GA/2GA/4GA input – 1*0GA/2GA/4GA output
Digital Display & 150A ANL fuse



MINI ANL FUSE HOLDER - ROUND

MODEL : QFH-MANL-60A

Configuration : 1*4GA/8GA/10GA input – 1*4GA/8GA/10GA output
60A MANL fuse



MINI ANL FUSE HOLDER - RECTANGLE

MODEL: QFH-MANL-60A -ART

Configuration : 1*4GA/8GA/10GA input – 1*4GA/8GA/10GA output
60A MANL fuse



MINI ANL FUSE HOLDER WITH 8GA POWER CABLE

MODEL: QFH-MANL-60APW

Configuration : 1*4GA/8GA/10GA input – 1*4GA/8GA/10GA output
With 30CM 8GA Power Cable & 60A MANL fuse



CIRCUIT BREAKER

MODEL : QCB-40A

Rating 40A



CIRCUIT BREAKER

MODEL : QCB-60A

Rating 60A



CIRCUIT BREAKER

MODEL : QCB-100A

Rating 300A



CIRCUIT BREAKER

MODEL : QCB-300A

Rating 300A

Quaden®

DISTRIBUTION BLOCKS



Satin Nickel Finish
Zinc Alloy

DISTRIBUTION BLOCKS



MANL DISTRIBUTION BLOCK

MODEL : DB-DUAL

Configuration : 2*0GA/4GA input - 4*4GA/8GA output with 60A Mini ANL fuse & 2*0GA/4GA input - 4*4GA/8GA output out fuse
With fuse failure indicator



MANL DISTRIBUTION BLOCK

MODEL : QDB-3X2-MANL60

Configuration : 3*4 GA INPUT - 2*8GA output with 60A Mini ANL fuse
With fuse failure indicator



MANL DISTRIBUTION BLOCK

MODEL : QDB-3X3-MANL60

Configuration : 3*4GA input - 3*8GA output with 60A Mini ANL fuse
With fuse failure indicator



MANL DISTRIBUTION BLOCK

MODEL : QDB-3X4-MANL60

Configuration : 3*4GA input - 4*8GA output with 60A Mini ANL fuse
With fuse failure indicator



ANL DISTRIBUTION BLOCK

MODEL : QDB-1X2-ANL100

Configuration : 1*0GA input - 2*4GA output with 100A ANL fuse



ANL DISTRIBUTION BLOCK

MODEL : QDB-1X2-ANL100DD

Configuration : 1*0GA input - 2*4GA output with 100A ANL fuse
With Digital Display



ANL DISTRIBUTION BLOCK

MODEL : QDB-3X3-ANL100

Configuration : 1*0GA input - 3*4GA output with 100A ANL fuse



DISTRIBUTION BLOCK WITHOUT FUSE

MODEL : QDB-1X4WOF

Configuration : 1*4GA input - 4*8GA output without fuse



DISTRIBUTION BLOCK WITHOUT FUSE

MODEL : QDB-1X2WOF

Configuration : 1*0/4GA input - 2*4/8GA output without fuse

COPPER SERIES DISTRIBUTION BLOCKS



Resistant to corrosion
Manual reset button

COPPER SERIES DISTRIBUTION BLOCKS

COPPER TERMINALS WITH GOLD PLATING



MANL DISTRIBUTION BLOCK

MODEL: QDBCg-DUAL

Configuration : 2*0GA/4GA input - 4*4GA/8GA output with fuse
2*0GA/4GA input - 4*4GA/8GA output without fuse with fuse failure indicator

COPPER TERMINALS WITH GOLD PLATING



MANL DISTRIBUTION BLOCK

MODEL: QDBCg-3X2-MANL60

Configuration : 3*0/4GA input & 2*4/8GA output with Mini ANL 60A fuse

COPPER TERMINALS WITH GOLD PLATING



MANL DISTRIBUTION BLOCK

MODEL: QDBCg-3X3-MANL60

Configuration : 3*0/4GA input & 3*4/8GA output with Mini ANL 60A fuse

COPPER TERMINALS WITH GOLD PLATING




MANL DISTRIBUTION BLOCK

MODEL : QDBCg-3X4-MANL60

Configuration : 3*0/4GA input - 4*4/8GA output with Mini ANL 60A fuse

COPPER TERMINALS WITH GOLD PLATING

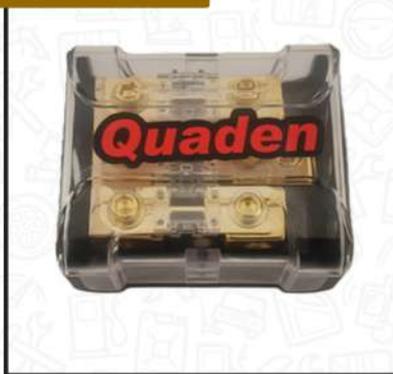


MANL DISTRIBUTION BLOCK

MODEL: QDBCg-1X3-MANL60

Configuration : 1*0/4GA input - 3*4/8GA output with Mini ANL 60A fuse

COPPER TERMINALS WITH GOLD PLATING

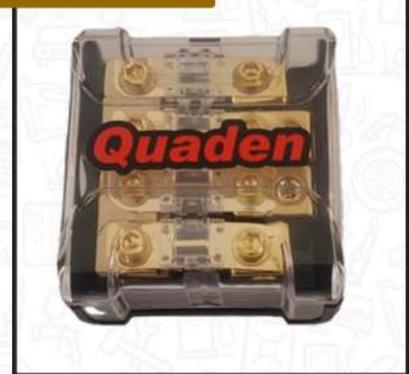

MANL DISTRIBUTION BLOCK

MODEL: QDBCg-1X4-MANL60

Configuration : 1*0/4GA input - 4*4/8GA output with Mini ANL 60A fuse

COPPER TERMINALS WITH GOLD PLATING



DISTRIBUTION BLOCK WITHOUT FUSE

MODEL: QDBCg-3X4-WOF

Configuration : 3*0/4 input - 4*4/8GA output without fuse

COPPER TERMINALS WITH GOLD PLATING



DISTRIBUTION BLOCK WITHOUT FUSE

MODEL: QDBCg-1X2 WOF

Configuration : 1*0GA input - 2*4GA output without fuse

COPPER TERMINALS WITH GOLD PLATING



DISTRIBUTION BLOCK WITHOUT FUSE

MODEL : QDBCg-1X3-WOF

Configuration : 1*0/4GA input - 3*4/8GA output without fuse

COPPER SERIES FUSE HOLDERS & BATTERY TERMINAL

COPPER TERMINALS WITH
GOLD PLATING



MANL FUSE HOLDER

MODEL: QFHCG-MANL 60A

Configuration : 1*8GA input -
1*8GA output with Mini ANL 60A
fuse

COPPER TERMINALS WITH
GOLD PLATING



ANL FUSE HOLDER

MODEL: QFHCG-CRANL125A

Configuration : 1*0/4GA input -
1*0/4GA output with ANL 125A
Ceramic fuse

COPPER TERMINALS WITH
GOLD PLATING



BATTERY TERMINAL

MODEL: QBTCG-1X0F/2*4WOF

Configuration : 0/4GA output
with fuse - 2* 4/8GA output
without fuse

COMPETITION SERIES DISTRIBUTION BLOCKS



Resistant to corrosion
Manual reset button

COMPETITION SERIES DISTRIBUTION BLOCKS

COPPER TERMINALS WITH
REAL GOLD PLATING



ANL DISTRIBUTION BLOCK

MODEL : QDBCG-5X6-CR100

Configuration : 5*0GA/4GA input
– 6*0GA/4GA output with 100A
ceramic fuse

COPPER TERMINALS WITH
REAL GOLD PLATING



**DISTRIBUTION BLOCK
WITHOUT FUSE**

MODEL: QDBCG-5X6WOF

Configuration : 5*0GA/4GA input
– 6*0GA/4GA output without fuse

COPPER TERMINALS WITH
REAL GOLD PLATING



ANL DISTRIBUTION BLOCK

MODEL : QDBCG-3X4-CR100

Configuration : 3*0GA/4GA input
– 4*0GA/4GA output with 100A
Ceramic fuse

COPPER TERMINALS WITH
REAL GOLD PLATING



**DISTRIBUTION BLOCK
WITHOUT FUSE**

MODEL: QDBCG-3X4WOF

Configuration : 3*0GA/4GA input
– 4*0GA/4GA output without fuse

FUSES



Resistant to corrosion
Manual reset button

FUSES



MINI ANL FUSE

Rating: 15A, 20A, 30A, 40A, 50A,
60A, 80A, 100A & 125A



ANL FUSE

Rating: 100A, 125A, 150A, 175A,
200A, 250A & 300A



CERAMIC ANL FUSE

Rating: 125A & 250A

INSTALLATION ACCESSORIES



INSTALLATION ACCESSORIES



CABLE TIE MOUNT

MODEL : QCTM-2525 & QCTM-3030

Heat resistant plastic
With double sided tape
ABS / UL94V- 2 rating
25*25 & 30*30mm



CABLE FASTENER

MODEL : QCF-SS, QCF-S, QCF-M & QCF-L

Heat resistant plastic
With double sided tape
Nylon 66 / Medium & small
Temperature <60°



BUCKLE GUARD

MODEL: QBG-8GA, QBG-4GA & QBG-0GA

Available for 8GA, 4GA & 0GA amplifier cable
Heat resistant plastic



FERRULE CRIMPING PLIER

MODEL: QCT-7GA

Suitable for 18GA to 7GA cables



ALUMINIUM SPEAKER BRACKET

MODEL: QSB-TO

suitable for Toyota
Suitable for 6.5 inch speakers



4GA WIRE WRAP MESH

MODEL: QWWM-4GA100-RB

Nylon Expandable Braided Sleeve for Wire Protection
Red & Black Colour



4GA WIRE WRAP MESH

MODEL: QWWM-4GA100-B

Nylon Expandable Braided Sleeve for Wire Protection
Black Colour



8GA WIRE WRAP MESH

MODEL: QWWM-8GA100-RB

Nylon Expandable Braided Sleeve for Wire Protection
Red & Black Colour



8GA WIRE WRAP MESH

MODEL: QWWM-8GA100-B

Nylon Expandable Braided Sleeve for Wire Protection
Black Colour

INSTALLATION ACCESSORIES



8GA WIRE WRAP MESH

MODEL: QWWM-8GA100-R

Nylon Expandable Braided Sleeve
for Wire Protection
Red Colour



OGA WIRE WRAP MESH

MODEL: QWWM-OGA100-R

Heat resistant plastic
With double sided tape
Nylon 66 / Medium & small
Temperature <math><60^{\circ}</math>



OGA WIRE WRAP MESH

MODEL: QWWM-OGA100-B


Available for 8GA, 4GA & OGA
amplifier cable
Heat resistant plastic



CABLE STRIPPING TOOL

MODEL: QCST-416

Suitable for 10GA to OGA cables

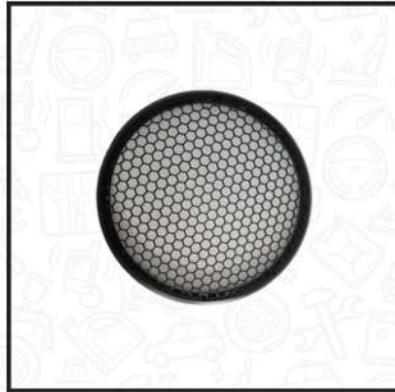

ALUMINIUM SPEAKER GRILL

MODEL: QSG-12

Suitable for 12" woofers




ALUMINIUM SPEAKER GRILL

MODEL: QSG-10

Suitable for 10" woofers

INSTALLATION ACCESSORIES

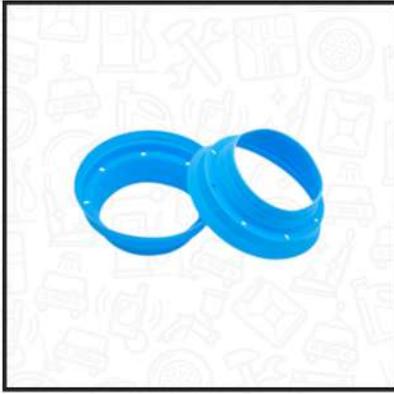

SILICON SPEAKER COVER

MODEL : QSPC-SIL-BL

Suitable for 6.5 inch speaker
Heat Resistant silicon
Blue Colour



SILICON SPEAKER COVER

MODEL : QSPC-SIL-BLK

Suitable for 6.5 inch speaker
Heat Resistant silicon
Black Colour



ZIP TIE MOUNT

MODEL : QZTM-15 & QZTM-26

Available in 150 mm & 260 mm



SADLE CABLE HOLDER

MODEL : QSCH-0

Size : Medium



SADLE CABLE HOLDER

MODEL : QSCH-2S

Size : Small



HEAT SHRINK TUBE

MODEL : QHST-MC

660 pcs pf heat shrink tubes
Multi colour box



TESA WRAPPING TAPE

QTP-19MM

19mm width
25 mts roll



DIGITAL CAPACITOR

MODEL : QPC-15D

1.5F capacitor with digital display
Auto display off
Reverse polarity protection



DIGITAL CAPACITOR

MODEL: QPC-20D

20F Capacitor with digital display
and auto display off
Reverse polarity protection
1x3 distribution block with 100A
Mini ANL fuse
Gold plated terminals

TYRE PRESSURE MONITORING SYSTEM



TYRE PRESSURE MONITORING SYSTEM



MODEL : QTPMS-T91 DISPLAY



MODEL : QTPMS-T91 INTERNAL SENSOR

Features

- Auto sensor positioning
- LCD Display
- Realtime display of Tyre pressure and Temperature
- Audio Visual Alarm in case of over or under pressure
- Simultaneous display of pressure and temperature

TPMS Internal Sensor specifications:

- Working voltage : 2.1V- 3.5V
- Frequency : 433.92MHz
- Pressure Measurement : 0-116 Psi
- Temperature Measurement : -40°C – 125°C

Display Specifications:

- Charging : Solar Charge
- Working voltage : 4.5 V- 6.0V
- Frequency : 433.92MHz
- Working Temperature : -20°C-85°C

BRAND OWNER:

QUADEN ENTERPRISE

#52, 2nd H Main Road
11th Block, Nagarbhavi 2nd Stage
Bengaluru - 560072

C & F FOR INDIA:

PRO VENTURES

No. 8/1, 1st Floor, 4th Cross, H.Siddaiah Road,
Sudhamanagar, Bengaluru - 560027